


profile for entrance mat framing




foloentry™ BU

Matwell frame to create, finish and protect a recess in the sub-floor that is used to accommodate an entrance barrier mat. FOLOENTRY BU can accommodate entrance mats up to 23 mm in thickness and is reversible to allow quick installation of the most popular mat thicknesses (18 mm and 23 mm).

The matwell can also be infilled with screed to suit thinner gauge entrance mats.

The matwell frame is supplied with fixing connectors for easy on-site assembly and is fixed to the substrate prior to screeding and mat installation.

Illustrated scale dimension 1:1

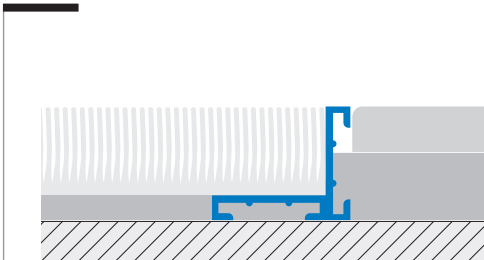

FOLOENTRY BU 18/23 AS Aluminium Silver

Reversible profile in aluminium. It can match two different entrance mat thicknesses.

Material: Extruded Aluminium Anodised
Length: 2,70 meters
Colour : Silver

H + H ₁	Art.	Finish
18 / 23	BU 18/23 AS	Aluminium Silver

FOLOENTRY BU 18/23 ON Natural Brass

Reversible brass profile. It can match two different entrance mat thicknesses.

Length: 2,70 meters

H + H ₁	Art.	Finish
18 / 23	BU 18/23 ON	Natural Brass

FOLOENTRY BU* Mounting Accessories

Natural WS brass fixing clamp to put down in the cement and internal corners bracket in natural aluminium to help junction of 45° cut profiles.

Art.	Finish
BUS 20 ON	Natural Brass
BUI 20 AN	Natural Aluminium