


modular structural joint

jointec™ GM

Modular structural joint adjustable to different heights with visible upper part in either brass or aluminium and lower module in aluminium. Designed to bear structural movements of large sized buildings. They are installed over the spaces existing between two semi-detached parts of a building of smaller entity or between different beam bays. They can connect and close these inter-spaces adjusting themselves up-wards, down-wards and even transversally, according to the shrinkage-settlement movements of the building, either cyclic or permanent. Within the flooring bays frame created with the structural joints, a further surface subdivision with a suitable pattern of movement joints should be always provided for. See relevant indications on page 167. Illustrated scale dimension 1:2

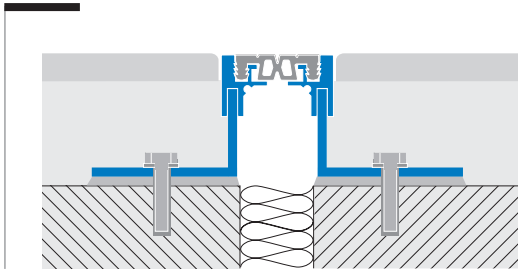

JOINTEC GM/GML-ON* Natural Brass 50 and 60 mm width

Extruded profile joint with visible top part in brass and inferior part in aluminium. High resistance to chemical agents and mechanical impact over time. Suitable for both indoor and outdoor laying. Highly elastic 37 or 47 mm wide synthetic rubber insert.

Out-of-standard heights can be supplied on request thanks to the system modularity.

Material: Extruded Natural Brass

Insert: Resinprene

Colours of insert*: Black, Cement Grey

Length: 3,00 metres



JOINTEC GM/GML-AN* Natural Aluminium 50 - 60 mm width

Extruded profile joint entirely in aluminium. Good resistance to chemical agents and mechanical impact over time. Highly elastic 37 or 47 mm wide synthetic rubber insert.

Out-of-standard heights can be supplied on request thanks to the system modularity.

Material: Extruded Natural Aluminium

Insert: Resinprene

Colours of insert*: Black, Cement Grey

Length: 3,00 metres



JOINTEC GM/GML-IL* Stainless Steel finish width 50 - 60 mm



Aluminium profiles with a stainless steel covered aluminium structure for improved aesthetics, durability and increased resistance to most diluted chemical products. The profile is not perfectly corresponding with the above section.

Material: Extruded Natural Aluminium + Stainless Steel AISI 304

Insert: Resinprene

Insert colours*: Black (suggested), Cement Grey

Length: 3,00 metres

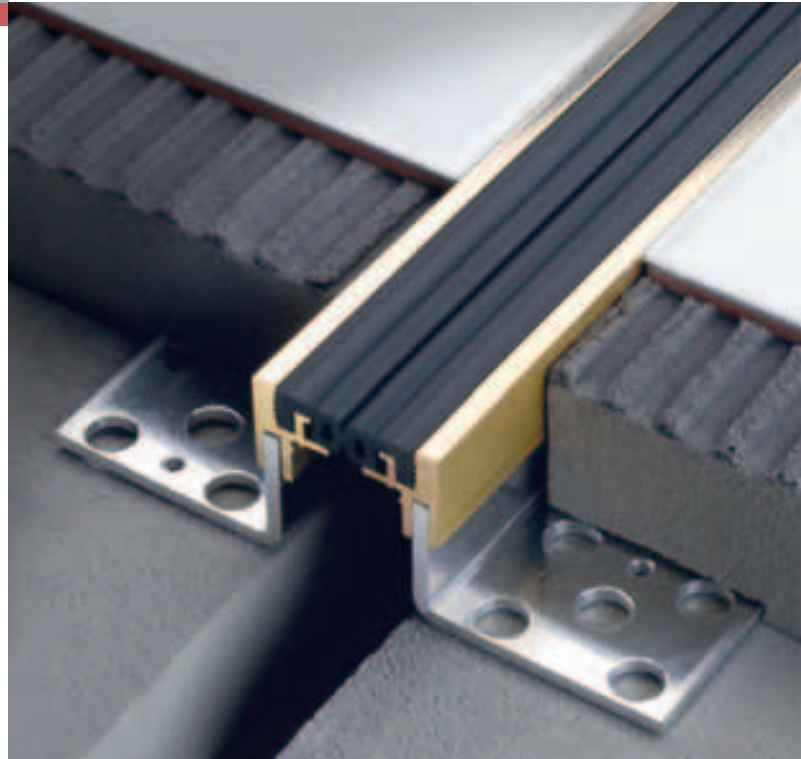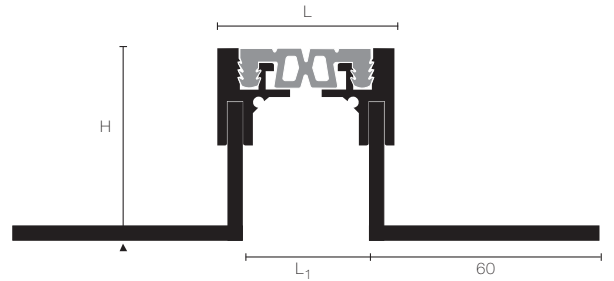

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	50	38	Brass + insert	GM 350 ON 51/23
50	50	38	Brass + insert	GM 500 ON 51/23
75	50	38	Brass + insert	GM 750 ON 51/23

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	60	48	Brass + insert	GML 350 ON 51/23
50	60	48	Brass + insert	GML 500 ON 51/23
75	60	48	Brass + insert	GML 750 ON 51/23

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	50	38	Aluminium + insert	GM 350 AN 51/23
50	50	38	Aluminium + insert	GM 500 AN 51/23
75	50	38	Aluminium + insert	GM 750 AN 51/23

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	60	48	Aluminium + insert	GML 350 AN 51/23
50	60	48	Aluminium + insert	GML 500 AN 51/23
75	60	48	Aluminium + insert	GML 750 AN 51/23

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	50	38	Stainless Steel + insert	GM 350 IL 51/23
50	50	38	Stainless Steel + insert	GM 500 IL 51/23
75	50	38	Stainless Steel + insert	GM 750 IL 51/23

H=mm	L=mm	L ₁ =mm	Finish	Art.
35	60	48	Stainless Steel + insert	GML 350 IL 51/23
50	60	48	Stainless Steel + insert	GML 500 IL 51/23
75	60	48	Stainless Steel + insert	GML 750 IL 51/23