


modular concrete rule for casting concrete in industrial floors

jointec™ GC

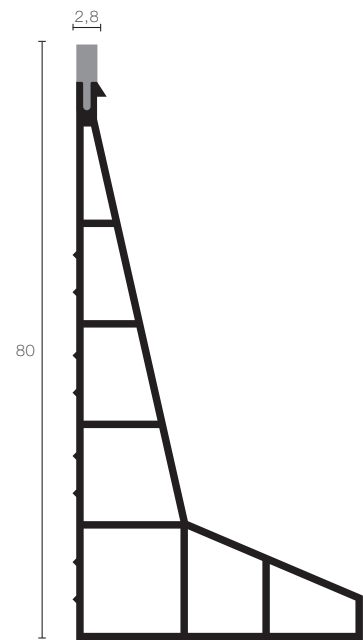

PVC joint conceived to create a "grid" at floor level for cement industrial paving, made through forming and smoothing with the vibrating float.


First fit joints at the required height in bays of generally 5 x 5 meters. Proceed then casting concrete and forming it leaning directly on the joint which will work as level line. It will not be necessary to make subsequent saw cuts and filling in the floors, thus completing the job properly at one go.

Patent pending.

Illustrated scale dimension 1:1

The application drawing here below shows how the joint controls the movement zones and possible fissuring points.

Quick assembly, performing and long lasting, time saving with a perfect result.

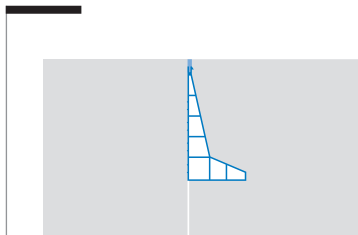

JOINTEC GC 80 P 23 Co-extruded synthetic resin

Base module in co-extruded synthetic resin, rigorously controlled during production, with visible part in cement grey colour. Set to correct surface level. Screeding can then be undertaken.

Material: PVC

Length: 2,50 meters, on request 5,00 meters



H=mm

80

Colour

Cement Grey

Art.

GC 80 P 23


modular along perimeter and slab casting discontinuities

jointec™ GC



Along the perimeter there must necessarily be a sufficient dilatation space. Using the joint GC, plus the soft profile GCP you will get at one go both the required level on which to place the shafts, the necessary dilatation and a nice finish of the perimeter, avoiding need of further skirting.

Thanks to its modularity, the joints GC can be coupled and mounted with the suitable PVC profile GCR, thus obtaining a double-performing control joint, with high absorption and movement qualities, as required for example in correspondence of slab casting discontinued placements.

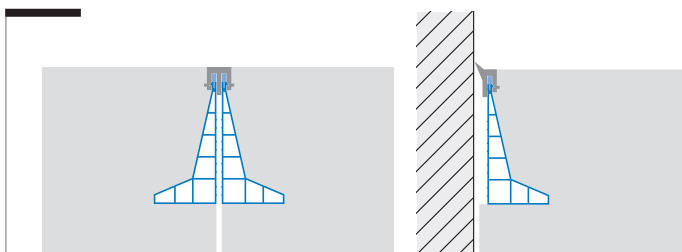

JOINTEC GCP 80 P 23 Synthetic Resin Resinflex

Profile to match with the base modul GC to form a surface perimeter joint which can replace traditional skirtings.

Material: Resinflex
Length: in rolls of 100 meters

JOINTEC GCR 80 P 23 Synthetic Resin Resinflex

Profile to mount with two base moduls GC placed back-to-back, creating a joint for breaks in the screeding.

Material: Resinflex
Length: in rolls of 100 meters

B=mm

12

Colour

Cement Grey

Art.

GCP 80 P 23

B=mm

15

Colour

Cement Grey

Art.

GCR 80 P 23